

Plate & Shell

Fully Welded Heat Exchanger

-High Pressure. Low Fouling. Gasket-Free

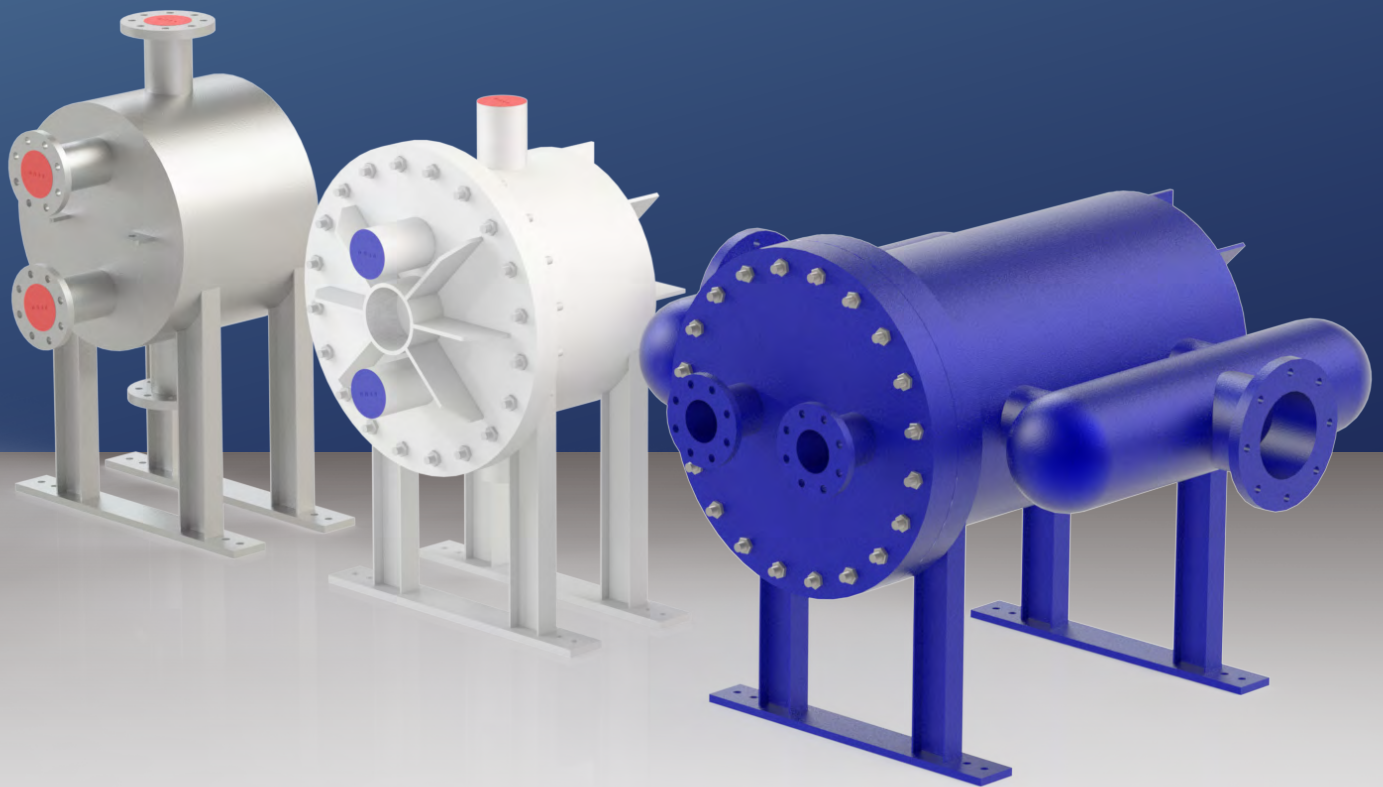


Plate & Shell Heat Exchanger (PSHE)

The PSHE range of heat exchangers are new generation heat exchangers, combining the best properties of the Plate & Frame and Shell & Tube heat exchangers. The PSHE provides high heat transfer rates with a high pressure and temperature operating range. They have no gaskets, are compact, low fouling and can operate at close approach temperatures.

At the heart of the PSHE is a fully welded pack of circular plates without gaskets. This plate pack is housed within a tubular shell to provide a strong compact construction. The PSHE series have a very wide operating range with capacities of up to 100 MW / units, and can operate at pressures up to **100 bar** and temperatures up to **400°C**. They have a low maintenance design that provides flexibility to select different material and

Applications:


- Steam condensers and generators
- Condensate heaters and coolers
- Exhaust gas recovery
- LNG applications
- Crude oil heaters and coolers
- Gas heaters and coolers
- Hydrocarbon condensers and evaporators
- Product heaters and coolers
- Gas heaters and coolers
- Heat-recovery exchangers like feed/effluent
- Overhead condensers and gas liquefiers
- Thermosyphon and kettle reboilers
- Reactor temperature-control heat exchangers
- Cryogenic applications
- Evaporators
- Droplet separators
- Evaporators/droplet separators (Combined)
- Cascades
- Desuperheaters
- Oil coolers
- Subcoolers
- Condensers

Benifits:

- No Gaskets or Brazing
- High Integrity / Total Containment
- Strong and Safe Construction
- Protection to Thermal and Pressure Cycling
- Thermally Efficient
- Compact and Low Weight
- Flexible Construction
- Proven, Reliable Technology
- Low Fouling
- Minimal Maintenance Requirement
- Close Approach Temperatures



Technical Specification

- Maximum Heat Transfer Area • 2,000 m²/exchanger
- Maximum **100 bar** possible
- -164 to +**400°C**

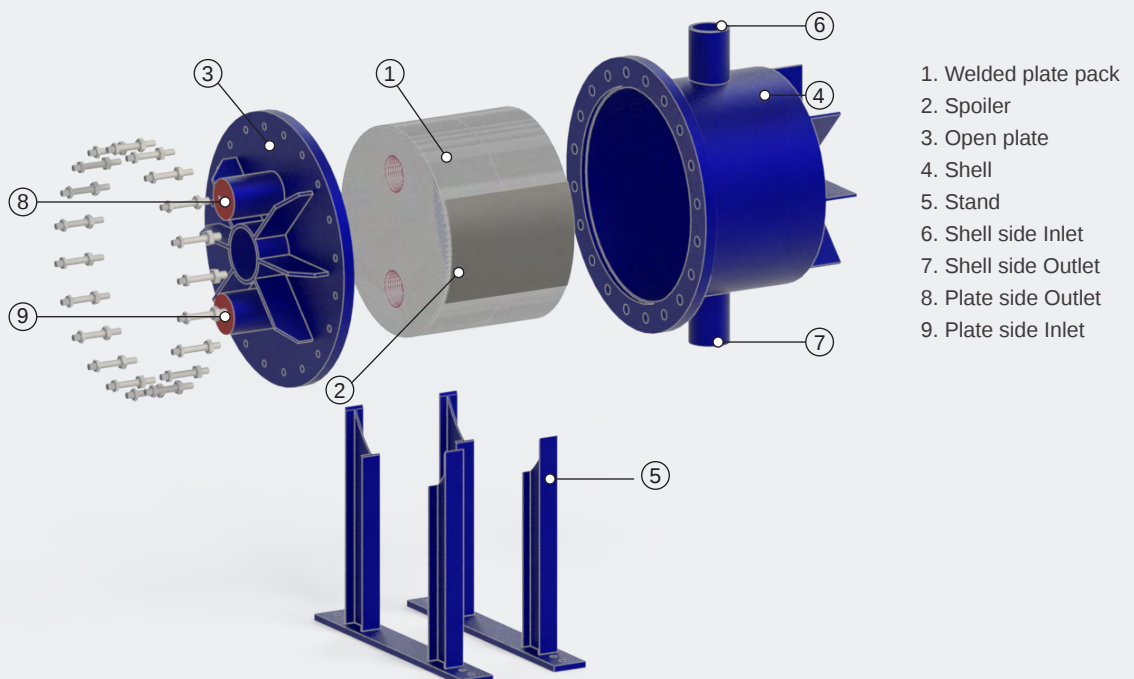

Model name code

BPS - 179 - 16 - 96 - W/D/C

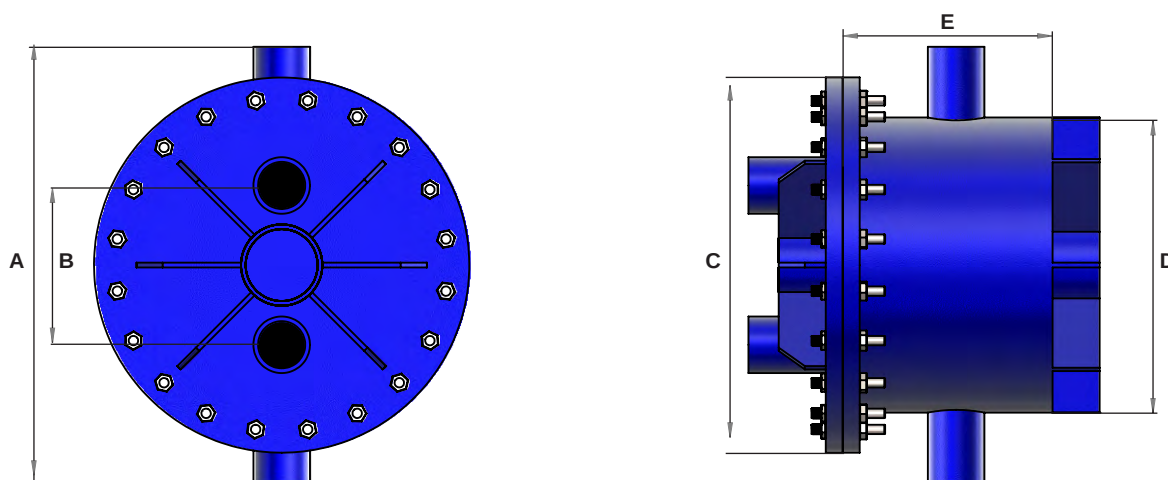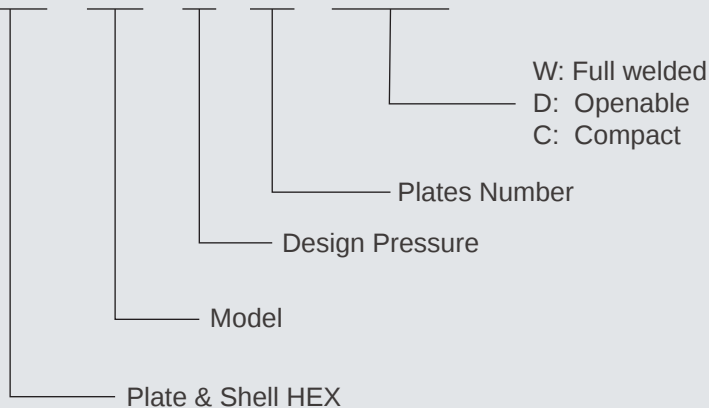

***Dimensions in mm*

Model	A	B	C	D	E	Plates side port	Shell side port
BPS16	240	98	250	168	2.4*N+2	DN15	DN15-DN80
BPS22	448	135	310	219	2.4*N+3	DN20	DN20-DN100
BPS46	469	174	368	269	2.4*N+4	DN40	DN25-DN200
BPS72	565	277	460	355	2.8*N+4	DN50	DN25-DN300
BPS128	600	298	694	464	2.8*N+6	DN80	DN25-DN350
BPS179	963	338	725	559	2.8*N+6	DN100	DN25-DN400
BPS647	1520	650	1250	1016	3.2*N+6	DN150	DN25-DN700
BPS1200	1828	900	1548	1372	3.2*N+8	DN300	DN25-DN1000
BPS1600	2098	1000	1838	1562	3.2*N+8	DN350	DN25-DN1200

Material:

Shell	Plates
Carbon steel	AISI304
AISI 304	AISI 316L
AISI 316L	AISI 904L
AISI 904L	SMO
SMO	Ti
Ti	Nickle
Hastelloy	Hastelloy C276
Others	others